

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C07D 301/32	A1	(11) International Publication Number: WO 99/07690 (43) International Publication Date: 18 February 1999 (18.02.99)
(21) International Application Number: PCT/EP98/04693 (22) International Filing Date: 27 July 1998 (27.07.98) (30) Priority Data: 08/908,604 8 August 1997 (08.08.97) US (71) Applicant (for all designated States except MN): ARCO CHEMICAL TECHNOLOGY, L.P. [US/US]; Two Greenville Crossing, Suite 238, 4001 Kennett Pike, Greenville, DE 19807 (US). (71) Applicant (for MN only): ARCO CHEMIE TECHNOLOGIE NEDERLAND B.V. [NL/NL]; P.O. Box 7195, NL-3000 HD Rotterdam (NL). (72) Inventor: RUETER, Michael, A.; 350 Maiden Lane, Norris- town, PA 19401 (US). (74) Agent: SMAGGASGALE, Gillian, Helen; Mathys & Squire, 100 Gray's Inn Road, London WC1X 8AL (GB).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: PROPYLENE OXIDE PURIFICATION (57) Abstract Propylene oxide obtained by an epoxidation process which uses methanol as a solvent may be effectively treated to remove acetaldehyde by subjecting the crude epoxidation reaction product to fractional distillation. The methanol solvent is utilized during such distillation to lower the relative volatility of the acetaldehyde impurity, thereby making it possible to obtain a bottoms fraction containing substantially all the acetaldehyde. Purified propylene oxide having a reduced acetaldehyde concentration is removed as an overhead stream. Water may also be effectively separated from the propylene oxide using this procedure.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PROPYLENE OXIDE PURIFICATION

FIELD OF THE INVENTION

This invention provides a method of recovering propylene oxide in purified form from an epoxidation reaction mixture additionally comprised of methanol and contaminating amounts of acetaldehyde impurity. Such mixtures may be formed by epoxidizing propylene with hydrogen peroxide using a titanium-containing zeolite such as titanium silicalite as a catalyst and methanol as a reaction solvent. Substantially all of the acetaldehyde may be removed by fractionation of the epoxidation reaction mixture in a distillation column wherein a concentration of methanol is maintained in the distillation column sufficient to suppress the volatility of the acetaldehyde so as to minimize the amount of acetaldehyde present in the overhead stream.

BACKGROUND OF THE INVENTION

In recent years, the production of propylene oxide from propylene using hydrogen peroxide as an oxidant and a titanium-containing zeolite as a zeolite as a catalyst has been proposed. Methanol is a particularly preferred reaction solvent for such purposes, as it tends to promote high catalyst activity and selectivity. Epoxidation processes of this type are described, for example, in U.S. Pat. Nos. 5,591,875, 4,833,260, 5,621,122, 5,646,314, and 4,824,976, EP Pub. No. 0732327, and Clerici et al., J. Catalysis 129, 159-167 (1991), the teachings of which are incorporated herein by reference in their entirety. Although such processes are capable of providing exceptionally high selectivity to propylene oxide, minor quantities of certain by-products such as acetaldehyde are inevitably formed. Since a satisfactory propylene oxide for commercial purposes should contain less than 100 ppm, and preferably less than 20 ppm, acetaldehyde, the development of methods for separating substantially all of the acetaldehyde by-product from such reaction mixtures is necessary. In addition, epoxidation processes of this type form water as a co-product with the water being derived from the hydrogen peroxide oxidant. Depending upon the method used to generate the hydrogen peroxide to be used in the

epoxidation reaction, water may also be present in the feed to the reactor. While epoxidation processes catalyzed by titanium-containing zeolites are remarkably tolerant of water, it will be necessary for most commercial purposes to obtain propylene oxide in substantially anhydrous form. An efficient method of removing water from the propylene oxide produced by such an epoxidation process therefore is needed.

SUMMARY OF THE INVENTION

Prior art methods for separating acetaldehyde from propylene oxide, which were principally developed in connection with organic hydroperoxide-based epoxidation processes wherein either ethylbenzene or t-butyl alcohol is used as a reaction solvent, have generally charged the crude propylene oxide, after removing substantially all the unreacted propylene, to a distillation column and removed propylene oxide and all lower boiling materials, including acetaldehyde, as an overhead product. A subsequent fractionation of the overhead product in a second distillation column then is employed to separate acetaldehyde as an overhead product from a bottoms fraction containing the propylene oxide.

We have now found that the substantial quantity of methanol present as a reaction solvent in a crude epoxidation product from a hydrogen peroxide/titanium silicalite process may be used to advantage in achieving the desired separation of acetaldehyde from propylene oxide. The presence of methanol at high concentrations substantially reduces the volatility of acetaldehyde relative to propylene oxide. Thus, instead of taking acetaldehyde overhead as in conventional purification schemes, the present invention operates by maintaining a concentration of methanol in the liquid phase within the distillation column sufficiently great so as to suppress the volatility of acetaldehyde and force all or substantially all of the acetaldehyde into a bottoms stream. Purified propylene oxide containing a reduced level of acetaldehyde is taken overhead. The overhead stream will also have a substantially lower water content as compared to that of the crude

epoxidation reaction product.

More specifically, the present invention provides a method of purifying propylene oxide produced in an epoxidation process wherein methanol is used as a solvent comprising the steps of

- 5 (a) feeding a crude epoxidation reaction product comprised of propylene oxide, methanol and acetaldehyde to a fractionator;
- (b) subjecting the crude epoxidation reaction product to fractional distillation within the fractionator;
- (c) withdrawing an overhead stream comprised of propylene oxide
10 and methanol and having a reduced level of acetaldehyde as compared to the crude epoxidation reaction product from the fractionator; and
- (d) withdrawing a bottoms stream comprised of methanol and acetaldehyde from the fractionator.

15 Said fractional distillation is performed under conditions such that the concentration of methanol within the fractionator is maintained at a level sufficiently high so as to substantially prevent acetaldehyde from being present at the point at which the overhead stream is withdrawn from the fractionator.

20 DESCRIPTION OF THE DRAWING

The accompanying drawing (Figure 1) illustrates in schematic form a particular embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

25 A crude epoxidation reaction product, from which unreacted propylene has been substantially removed by prior distillation such as a flash distillation or other such conventional distillation operation, is fed through line 2 to an intermediate zone of first fractionator 1. Depending upon the epoxidation conditions employed, the crude epoxidation reaction product generally has a composition comprised of the following components, in
30 percent by weight:

	propylene oxide	2-10
	methanol	60-85
	acetaldehyde	0.01-0.1
	water	10-25
5	ring-opened byproducts of propylene oxide (e.g., propylene glycol)	0.1-1
	propylene and/or propane	0.01-0.1

The first fractionator 1 may comprise a conventional distillation column or tower having a capacity appropriate to handle the desired volume of crude epoxidation reactor product within a given period of time and having a sufficient number of theoretical plates to accomplish the necessary separation of methanol and acetaldehyde from the propylene oxide. The use of a plate column is particularly advantageous. For economic reasons, the fractionator should normally comprise a single distillation column or tower, although the use of multiple columns or towers to accomplish the same result is not excluded.

Fractionator 1 is operated at conditions such that a first overhead stream comprised of propylene oxide and a minor amount of methanol can be removed through line 3 and substantially all of the acetaldehyde (preferably, at least 99%, more preferably, at least 99.9%) is removed in a first bottoms stream through line 4. It is essential that such conditions be selected to provide a concentration of methanol within the first fractionator 1 which is effective to render the acetaldehyde less volatile than the propylene oxide. Enough methanol must be taken overhead from the first fractionator such that a zone exists above the feed tray where both methanol and propylene oxide concentrations are sufficiently high for acetaldehyde to be heavier (i.e., less volatile) than both methanol and propylene oxide. This will prevent acetaldehyde from reaching the top of first fractionator 1 and permits, under optimum conditions, essentially all of the acetaldehyde in the feed to the first fractionator to be recovered in the bottoms stream. Typically, the process is operated so as to have at least 2 (more preferably,

at least 4) weight percent methanol in the overhead stream. To minimize the extent of additional downstream processing which is used, first fractionator 1 is preferably operated at a top pressure of from about 15 to about 50 psia and at a bottoms temperature of from about 80°C to about 110°C. It is particularly advantageous to operate first fractionator 1 such that the top zone thereof is at a pressure of about 25 to 40 psia and the bottom zone thereof is at a temperature of about 93°C to 104°C. First fractionator 1 generally contains from 20 to 60 (more preferably, 30 to 50) theoretical vapor-liquid contacting stages. A suitable reflux/distillate ratio is important in achieving optimum results; this reflux ratio should preferably range between 10:1 and 30:1 (more preferably, 15:1 to 25:1). Heat to the fractionator may be supplied by means of a reboiler.

The first bottoms stream typically will contain substantial amounts of methanol and water in addition to the acetaldehyde, together with other minor by-products such as propylene glycol which have volatilities under the distillation conditions less than that of propylene oxide. An additional advantage of the process of this invention is that it is capable of producing propylene oxide which is substantially free of water, as the bottoms stream will typically contain nearly all (e.g., at least 99%) of the water originally present in the crude epoxidation reaction product. The bottoms stream may be purified by conventional means such as fractional or extractive distillation to recover the methanol for reuse as the solvent in the epoxidation process.

Where significant amounts of propylene remain in the first overhead stream, which typically will also contain about 90 to 98 weight percent propylene oxide, 2 to 6 weight percent methanol, 0 to 2 weight percent propylene, and less than 20 ppm (more preferably, less than 5 ppm) acetaldehyde, a second fractionator may be utilized to remove said residual propylene. The first overhead stream thus may be charged to an intermediate zone of second fractionator 5 through line 3. Fractionator 5 which is operated so that the propylene is withdrawn as a second overhead

stream from a top zone through line 6. Propylene oxide which is essentially free of propylene is withdrawn as a second bottoms fraction from a bottom zone of second fractionator 5 through line 7. Second fractionator 5 is operated advantageously at a top zone pressure of from about 140 to about 300 psia and at a bottom zone temperature of from about 115°C to about 150°C. Particularly preferred operation involved a pressure of about 160 to 220 psia in the top zone thereof and a temperature of about 120°C to 140°C in the bottom zone thereof. From about 5 to about 15 (more preferably, 5 to 10) theoretical vapor-liquid contacting stages are preferably present in the second fractionator. The reflux to distillate ratio is suitably from 10:1 to 50:1 with 20:1 to 40:1 being the preferred range.

Further purification of the propylene oxide present in the second bottoms stream may be accomplished if so desired by subjecting said stream to extractive distillation. Extractive distillation of impure propylene oxide fractions is well known in the art and is described, for example, in extensive detail in the following U.S. patents, each of which is incorporated herein by reference in its entirety: 3,337,425, 3,338,800, 3,464,897, 3,578,568, 3,843,488, 4,140,588, 4,971,661, 5,000,825, 5,006,206, 5,116,465, 5,116,466, 5,116,467, 5,129,996, 5,133,839, 5,139,622, 5,145,561, 5,145,563, 5,154,803, 5,154,804, 5,160,587, 5,340,446, 5,453,160, 5,464,505, and 5,620,568.

For example, the second bottoms stream (or, alternatively, the first overhead stream, particularly where the first overhead stream contains little or no unreacted propylene) is fed through line 7 to an intermediate zone of extractive distillation column 8 wherein it is in countercurrent contact with an extractive solvent such as a hydrocarbon (e.g., octane), heavy polar organic compound (e.g., propylene glycol), or such other substance known in the art to be useful for such purpose. Propylene oxide of high purity is removed from a top zone of column 8 through line 9, while the extractive solvent containing relatively less volatile impurities such as water, methanol and the

like are removed as an extract stream from a bottom zone of column 8 through line 10. The extract stream is fed to an intermediate zone of stripper 11, which is so operated that components having boiling points above propylene oxide are removed overhead via line 12. The extractive solvent is removed via line 13 as a bottoms stream for recycle to an upper zone of extractive distillation column 8 via line 14. Make-up extractive solvent can be added to line 14 from line 15.

EXAMPLE

In a first distillation column containing 40 theoretical stages (including reboiler), a crude epoxidation reaction product from which unreacted propylene is largely removed is introduced at the 16th stage from the top of the column. A total condenser is used so that distillate product is withdrawn as a liquid. The feed to the column is as follows:

	<u>Component</u>	<u>Wt. %</u>
15	Propylene Oxide	7.2
	Water	16.9
	Methanol	74.8
	Acetaldehyde	0.04
	Propylene & Propane	0.06
20	Ring-Opened Products	0.95
	Other Heavy Components	0.05

The first distillation column is operated at a molar reflux ratio (reflux to distillate) of 19.7. The pressure in the column condenser is set at 30 psia and the column operated with a pressure drop of 0.2 psi per tray, resulting in a bottom pressure of about 38 psia. The bottoms (reboiler) temperature is 98°C and the top (condenser) temperature is 51°C.

Under these conditions, 99.93% of the acetaldehyde in the feed to the column is recovered in the bottom stream and 99.7% of the propylene oxide is recovered overhead. The compositions of these two product streams are as follows:

8

		Distillate	Bottoms
		<u>Wt. %</u>	<u>Wt. %</u>
5	<u>Component</u>		
	Propylene Oxide	94.8	0.023
	Water	0.0006	18.2
	Methanol	4.4	80.5
	Acetaldehyde	0.00035	0.044
	Propylene & Propane	0.8	0
	Ring-Opened Products	0	1.03
	Other Heavy Components	0	0.2
10			

I claim:

1. A method of purifying propylene oxide produced in an epoxidation process wherein methanol is used as a solvent comprising the steps of

- (a) feeding a crude epoxidation reaction product comprised of propylene oxide, methanol and acetaldehyde to a fractionator;
- (b) subjecting the crude epoxidation reaction product to fractional distillation within the fractionator;
- (c) withdrawing an overhead stream comprised of propylene oxide and methanol and having a reduced level of acetaldehyde as compared to the crude epoxidation reaction product from the fractionator; and
- (d) withdrawing a bottoms stream comprised of methanol and acetaldehyde from the fractionator .

2. The method of claim 1 wherein said epoxidation process utilizes a titanium containing-zeolite as a catalyst.

3. The method of claim 1 wherein said epoxidation process utilizes hydrogen peroxide as an oxidant.

4. The method of claim 1 wherein the concentration of methanol in the crude epoxidation reaction product is 60 to 80 weight percent.

5. The method of claim 1 wherein at least 99 percent of the acetaldehyde in the crude epoxidation reaction product is recovered in the bottoms stream.

6. The method of claim 1 wherein said fractional distillation is performed at a top pressure of 15 to 50 psia.

7. The method of claim 1 wherein said fractional distillation is performed at a bottoms temperature of from 80 to 110°C.

8. The method of claim 1 wherein the crude epoxidation reaction product initially contains propylene and the crude epoxidation reaction

product prior to step (a) is subjected to an initial distillation wherein a substantial portion of the propylene is removed.

9. The method of claim 1 wherein the crude epoxidation reaction product and the bottoms stream are additionally comprised of water.

10. The method of claim 1 wherein the overhead stream is fed to a second fractionator wherein the overhead stream is subjected to distillation such that a second overhead stream comprised of propylene and a second bottoms stream comprised of propylene oxide and substantially free of propylene are separately withdrawn from the second fractionator.

11. The method of claim 10 wherein the second bottoms stream is fed to an extractive distillation column wherein the second bottoms stream is subjected to extractive distillation with an extractive solvent such that a third overhead stream consisting essentially of propylene oxide and a third bottoms stream comprised of the extractive solvent and impurities present in the second bottoms stream are separately withdrawn from the extractive distillation column.

12. The method of claim 11 wherein the extractive solvent is selected from the group consisting of propylene glycol and octane.

13. The method of claim 1 wherein the first overhead stream contains at least 2 weight percent methanol.

14. The method of claim 1 wherein the fractionator has from 20 to 60 theoretical vapor-liquid contacting stages.

15. The method of claim 1 wherein said fractional distillation is performed using a reflux:distillate ratio of from 10:1 to 30:1.

16. A method of purifying propylene oxide produced in an epoxidation process wherein methanol is used as a solvent, hydrogen peroxide is used as an oxidant, and a titanium-containing zeolite is used as a catalyst comprising the steps of

- (a) feeding a crude epoxidation reaction product comprised of 2 to 10 weight percent propylene oxide, 60 to 85

weight percent methanol, 10 to 25 weight percent water and 0.01 to 0.1 weight percent acetaldehyde to a first fractionator having from 20 to 60 theoretical vapor-liquid contacting stages;


- (b) subjecting the crude epoxidation reaction product to fractional distillation within the fractionator at a top pressure of 15 to 50 psia, a bottoms temperature of 80°C to 110°C, and a reflux:distillate ratio of 10:1 to 30:1;
- (c) withdrawing an overhead stream comprised of propylene oxide and at least 2 weight percent methanol from the fractionator;
- (d) withdrawing a bottoms stream comprised of methanol, water and at least 99% of the acetaldehyde present in the crude epoxidation reaction product from the fractionator.

17. The method of claim 16 wherein the top pressure is 25 to 40 psia, the bottoms temperature is from 93°C to 104°C, and the reflux:distillate ratio is from 15:1 to 25:1.

18. The method of claim 16 wherein the overhead stream is comprised of at least 4 weight percent methanol.

19. The method of claim 16 wherein the bottom stream contains at least 99% of the water present originally in the crude epoxidation reaction product.

FIG-1

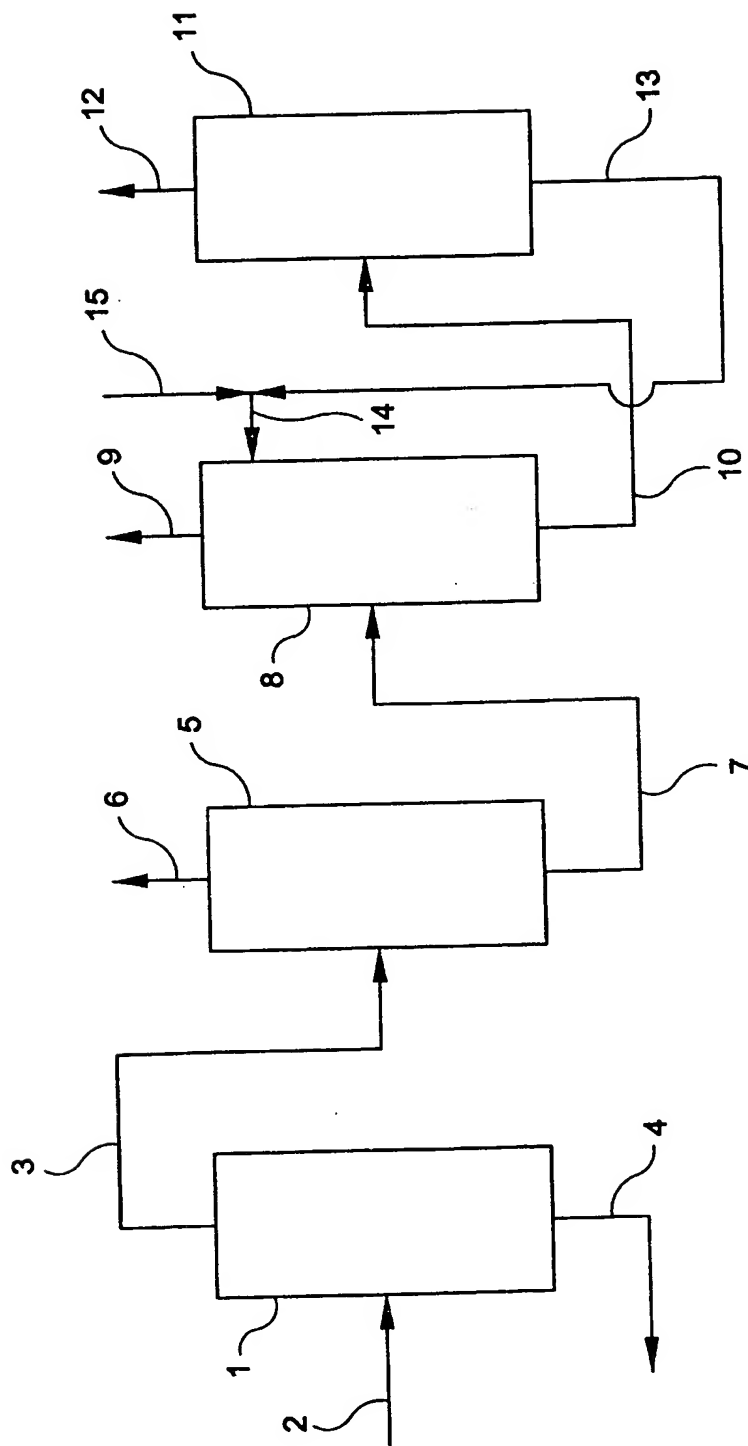

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 98/04693

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C07D301/32

According to International Patent Classification(IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C07D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 732 327 A (ARCO CHEMICAL TECHNOLOGY, L.P.) 18 September 1996 cited in the application see the whole document, particularly column 7, lines 23-34, column 10, lines 9-22, and claim 10, step (d) ---	1-19
X	EP 0 675 119 A (TEXACO DEVELOPMENT CORPORATION) 4 October 1995 see the whole document, particularly claim 8, second step ---	1-19
X	US 3 715 284 A (BURNS S P ET AL) 6 February 1973 see the whole document -----	1-19

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

10 November 1998

Date of mailing of the international search report

18/11/1998

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Allard, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 98/04693

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 732327	A	18-09-1996	US 5693834 A	02-12-1997
			CA 2170557 A	16-09-1996
			CN 1138039 A	18-12-1996
			JP 8245604 A	24-09-1996
			SG 43937 A	14-11-1997
EP 675119	A	04-10-1995	US 5489366 A	06-02-1996
			CA 2142062 A	29-09-1995
			JP 7278127 A	24-10-1995
US 3715284	A	06-02-1973	NONE	